DE VAKSHOP

Rain Bird SXB-360-SPYK microsproeier op grondpen - 360°

Praktische handleiding

Gebruiksinformatie van De Vakshop. Volg daarnaast de instructies van de fabrikant bij het geleverde product.

Hoe ver sproeit de SXB-360-SPYK?

Bij 2 bar is de straal regelbaar tot circa 0,46 m vanaf de sproeier. Dit is de straal, niet de diameter van het volledige sproeibeeld.

Hoe wordt het water verdeeld?

Dit model heeft een volledig rond sproeibeeld met acht afzonderlijke stralen. Kies de uitvoering die bij de afmetingen en beplanting past.

Kan ik de waterafgifte regelen?

Ja. Draai aan de buitenste kap om bereik en afgifte te regelen. Het opgegeven maximum is circa 49 l/uur bij 2 bar.

Welke aansluiting heeft de sproeier?

Er is een aansluiting voor passende 4-6 mm micro-irrigatieslang. De grondpen is 12,7 cm hoog.

Welke druk moet ik aanhouden?

Het opgegeven bereik is 1,0-2,0 bar. Meet bij voorkeur de druk terwijl de volledige irrigatiezone in bedrijf is.

Veilig monteren en onderhouden

Sluit de watertoevoer af en maak de installatie drukloos voordat je onderdelen losmaakt. Controleer de aansluiting en werking na montage. Maak de installatie tijdig winterklaar volgens de instructies van het systeem.

Fabrikantdocumentatie

Aansluitend vind je de ongewijzigde relevante pagina uit de internationale Rain Bird-productcatalogus (2022). Deze beschrijft de productserie; selecteer steeds jouw uitvoering.

Bekijk de oorspronkelijke Rain Bird-bron

Vragen over jouw toepassing? devakshop.nl/pages/contact

SXB-360 SPYK and XS-360TS-SPYK

Adjustable Flow Micro-spray on Spike

Applications

These adjustable micro-sprinklers with full circle pattern are shipped ready to install. Ideal for shrub plantings, trees, containers and flower beds

Features

- Micro-Sprinkler mounted on12.7cm spike
- 360° spray pattern
- Adjust flow and radius by turning outer cap
- Shipped with 4-6 mm barb connection for installation into 13-16 mm tubing
- Excellent distribution uniformity

Specifications

- Pressure: 1 to 2.0 bar
- Flow: adjustable from 0 to 49l/h for SXB-360-SPYK and 0 to 90 l/h for XS-360TS-SPYK
- Radius: adjustable from 0 to 46 cm for SXB-360-SPYK and from 0 to 2 m to XS-360TS-SPYK

Models

Select models shown. Review your regional price list for complete availability.

- XS-360TS-SPYK: Adjustable flow micro-spray on spike
- SXB-360-SPYK: Adjustable flow micro-spray on spike



XS-90, XS-180, XS-360 Series

Adjustable Flow Sprays

Applications

These sprays have a uniform emission pattern to provide excellent distribution. Adjustable flow/radius by turning integral ball valve. Ideal for ground cover and annual flower beds

Features

- Uniform emission pattern and excellent distribution
- 10-32 self-tapping threads fit into stake and riser assembly (PFR/RS)

Specifications


- Pressure: 0.5 to 2.5 bar
- Flow: 0 to 130 l/ h
- Radius:
- XS-90: adjustable from 0 to 3.3 m
- XS-180: adjustable from 0 to 3.4 m
- XS-360: adjustable from 0 to 4.1 m

Models

Select models shown. Review your regional price list for complete availability.

- XS-90: Adjustable flow/radius 90° spray
- XS-180: Adjustable flow/radius 180° spray
- XS-360: Adjustable flow/radius 360° spray



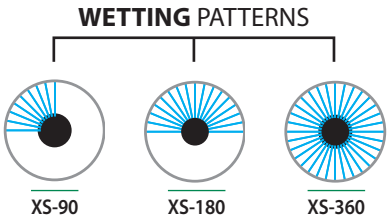

Xeri-Bubbler Performance

Pressure	✳		●	
bar	cm	l/h	m	l/h
1.0	0-19	0-33	0-1.4	0-64
1.5	0-32	0-41	0-1.8	0-78
2.0	0-46	0-49	0-2.0	0-90

Xeri-Sprays™ Performance

Pressure	XS-90 Radius of throw		XS-180 Radius of throw		XS-360 Radius of throw	
bar	meters	l/h	meters	l/h	meters	l/h
0.5	0-1.5	0-53	0-1.9	0-53	0-2.5	0-53
1.0	0-2.4	0-78	0-2.4	0-78	0-3.4	0-78
1.5	0-2.9	0-98	0-3.0	0-98	0-4.1	0-98
2.0	0-3.1	0-115	0-3.2	0-115	0-4.1	0-115
2.5	0-3.3	0-130	0-3.4	0-130	0-3.6	0-130