DE VAKSHOP

Rain Bird XB-20PC druppelaar - 7,6 l/uur

Praktische handleiding

Gebruiksinformatie van De Vakshop. Volg daarnaast de instructies van de fabrikant bij het geleverde product.

Hoeveel water geeft de XB-20PC?

Deze rood uitvoering geeft nominaal circa 7,6 liter per uur. De watergift per plant hangt daarnaast af van de ingestelde beregeningsduur.

Wat betekent drukcompenserend?

De druppelaar houdt de afgifte binnen het werkdrukbereik van 1,0-3,5 bar zo gelijkmatig mogelijk. Er moet wel voldoende toevoerdruk en capaciteit beschikbaar zijn.

Heeft deze uitvoering een keerklep?

Nee. Dit is de standaard XB-PC-uitvoering. Voor het beperken van leegloop bij hoogteverschillen is de XBCV-uitvoering bedoeld.

Hoe sluit ik de druppelaar aan?

De insteekuitvoering gaat in een geschikte irrigatieleiding. Op de uitlaattule kan passende ¼ inch XQ-verdeelslang worden aangesloten om het water bij de plant te brengen.

Welk filter heb ik nodig?

Houd voor dit model minimaal de voorgeschreven filtratiefijnheid van 100 micron / 150 mesh aan. Een filter met een hoger microngetal is grover en kan dus onvoldoende bescherming geven.

Veilig monteren en onderhouden

Sluit de watertoevoer af en maak de installatie drukloos voordat je onderdelen losmaakt. Controleer de aansluiting en werking na montage. Maak de installatie tijdig winterklaar volgens de instructies van het systeem.

Fabrikantdocumentatie

Aansluitend vind je de ongewijzigde relevante pagina uit de internationale Rain Bird-productcatalogus (2022). Deze beschrijft de productserie; selecteer steeds jouw uitvoering.

Bekijk de oorspronkelijke Rain Bird-bron

Vragen over jouw toepassing? devakshop.nl/pages/contact

Xeri-Bug™ Emitters

Pressure Compensating, Low-Flow Emitters for Watering the Root Zones of Plants, Trees, and Container Plants

Features

Pressure Compensating
A pressure-compensating design offers a consistent flow from 1.0 to 3.5 bar from the first emitter in the line to the last

Self-Cleaning
A self-flushing action cleans the emitters every time the system turns on and off, reducing maintenance and extending the life of the emitter.

Versatile Installation

- Self-piercing models feature barbs that make installation easier
- 1/2" FPT inlet that easily threads onto a 1/2" PVC riser and 2.0 gph models)
- Outlet barb securely retains 1/4" Distribution Tubing (XQ)

Durability
Robust design made from UV-resistant materials that are also resistant to chemicals

Compact Design
With a diameter less than a dime, the emitter is unobtrusive and easily hidden

Color coded
Color-coded to identify flow rate

Operating Range

- Opening Pressure: 1.0 bar
- Pressure: 1.0 to 3.5 bar
- Flow Rates: 1.9 , 3.79 or 7.57 l/h
- Filtration Requirement: 75 micron for 1.89 l/h, 100 micron for all others

Models: barb inlet x barb outlet

Select models shown. Review your regional price list for complete availability.

- XB-05PC-1032: Blue, 1.89 l/h
- XB-10PC-1032: Black, 3.79 l/h
- XB-20PC-1032: Red, 7.57 l/h


Xeri-Bug Emitter Specifications and Models

Model	Inlet Type/ Color	Nominal Flow l/h	Filtration Required micron/mesh
XB-05PC	Barb/Blue	2	75/200
XB-10PC	Barb/Black	4	100/150
XB-20PC	Barb/Red	8	100/150

Xeri-Bug Emitter Bag Quantities and Models

Flow Rate	Color	Bag Quantity	Model Number
2 l/h	Blue	100 8000	XB05PCBULK XB05MAXPAK
4 l/h	Black	100 8000	XB10PCBULK XB10MAXPAK
8 l/h	Red	100 8000	XB20PCBULK XB20MAXPAK

Xeri-Bug Emitter Performance

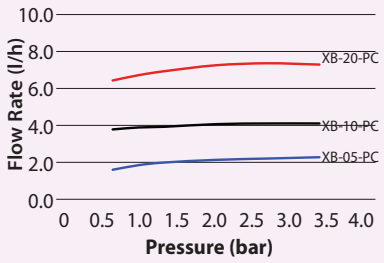



XB-05PC, XB-10PC, XB-20PC



Xeri-Bug™ Emitter, TS025-1/4" (6 mm) stake, and DBC025 Diffuser Bug Cap

How to Specify

